


HARDINGE HLV-H® lathe

Servo threading retrofit attachment

Electronic servo threading computer for English and Metric thread cutting


Go from this...

...to this!

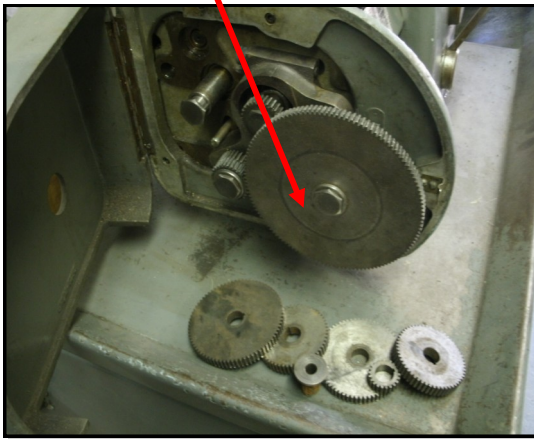

Gain the ability to cut *metric* pitch threads and expand your capacity for English imperial threads with our **bolt-on** servo driven lead screw retrofit

- Threading range: 4 – 250 TPI; .1mm – 6.35mm pitch
- No time consuming & expensive external gears setup
- Original gearbox remains intact. 1956 or newer HLVs
- Kit installs with only (2) drilled and tapped holes
- Rapid *retract* feature with slider adjustable speed
- Standard RH and LH threading ability
- Bonus ability to cut double, triple, quad lead threads
- Spindle RPM displayed on-screen w/over speed alert
- Carriage position stops setup help screen
- Precise position stopping for shoulder threading
- Pre-wired 115V input power supply and connectors

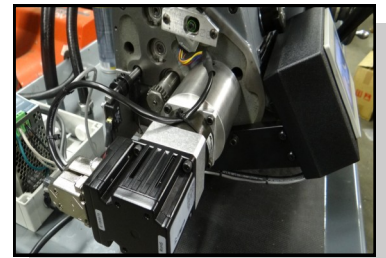

Simple installation and setup

Powerful USA made servo motor with microprocessor and a large color touch screen for data input, simplifies HLV-H threading operations and saves setup time.

